



US011728539B2

(12) **United States Patent**
Cournoyer

(10) **Patent No.:** **US 11,728,539 B2**
(45) **Date of Patent:** **Aug. 15, 2023**

(54) **SYSTEMS AND METHODS FOR MANAGING ADHESIVE JOINTS**

(71) Applicant: **Rivian IP Holdings, LLC**, Plymouth, MI (US)

(72) Inventor: **Travis Cournoyer**, Redondo Beach, CA (US)

(73) Assignee: **Rivian IP Holdings, LLC**, Irvine, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 314 days.

(21) Appl. No.: **16/997,340**

(22) Filed: **Aug. 19, 2020**

(65) **Prior Publication Data**

US 2022/0059810 A1 Feb. 24, 2022

(51) **Int. Cl.**

H01M 50/213 (2021.01)

H01M 50/502 (2021.01)

(52) **U.S. Cl.**

CPC **H01M 50/213** (2021.01); **H01M 50/502** (2021.01)

(58) **Field of Classification Search**

CPC ... H01M 50/213; H01M 50/502; H01M 50/20
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2016/0197315 A1* 7/2016 Tatsumi H01M 50/183
429/185

* cited by examiner


Primary Examiner — Jane J Rhee

(74) *Attorney, Agent, or Firm* — Haley Guiliano LLP

(57) **ABSTRACT**

A method for making a battery system includes applying fast-cure and slow-cure adhesives to interfaces between components. The fast-cure adhesive allows manipulation of the assembly during manufacturing while the slow-cure adhesive cures. The slow-cure adhesive provides desired strength and toughness as needed during use of the final assembly. The fast-cure adhesive and slow-cure adhesive have respective curing schedules. The fast-cure adhesive includes a moisture-curing adhesive or any other suitable adhesive curing on the order of seconds such as UV-activated or cyanoacrylate adhesives. The slow cure adhesive includes any suitable structural adhesive such as a two-part mix-cure epoxy or acrylic. The components adhered using the fast-cure adhesive and slow-cure adhesive include side wall sections, battery cells, mounting bracket, bus bars, or any other suitable components. The fast-cure and slow-cure adhesives are applied in any suitable pattern such as, for example, beads, dots, paths, non-intersecting paths, or any other suitable application shape.

13 Claims, 5 Drawing Sheets

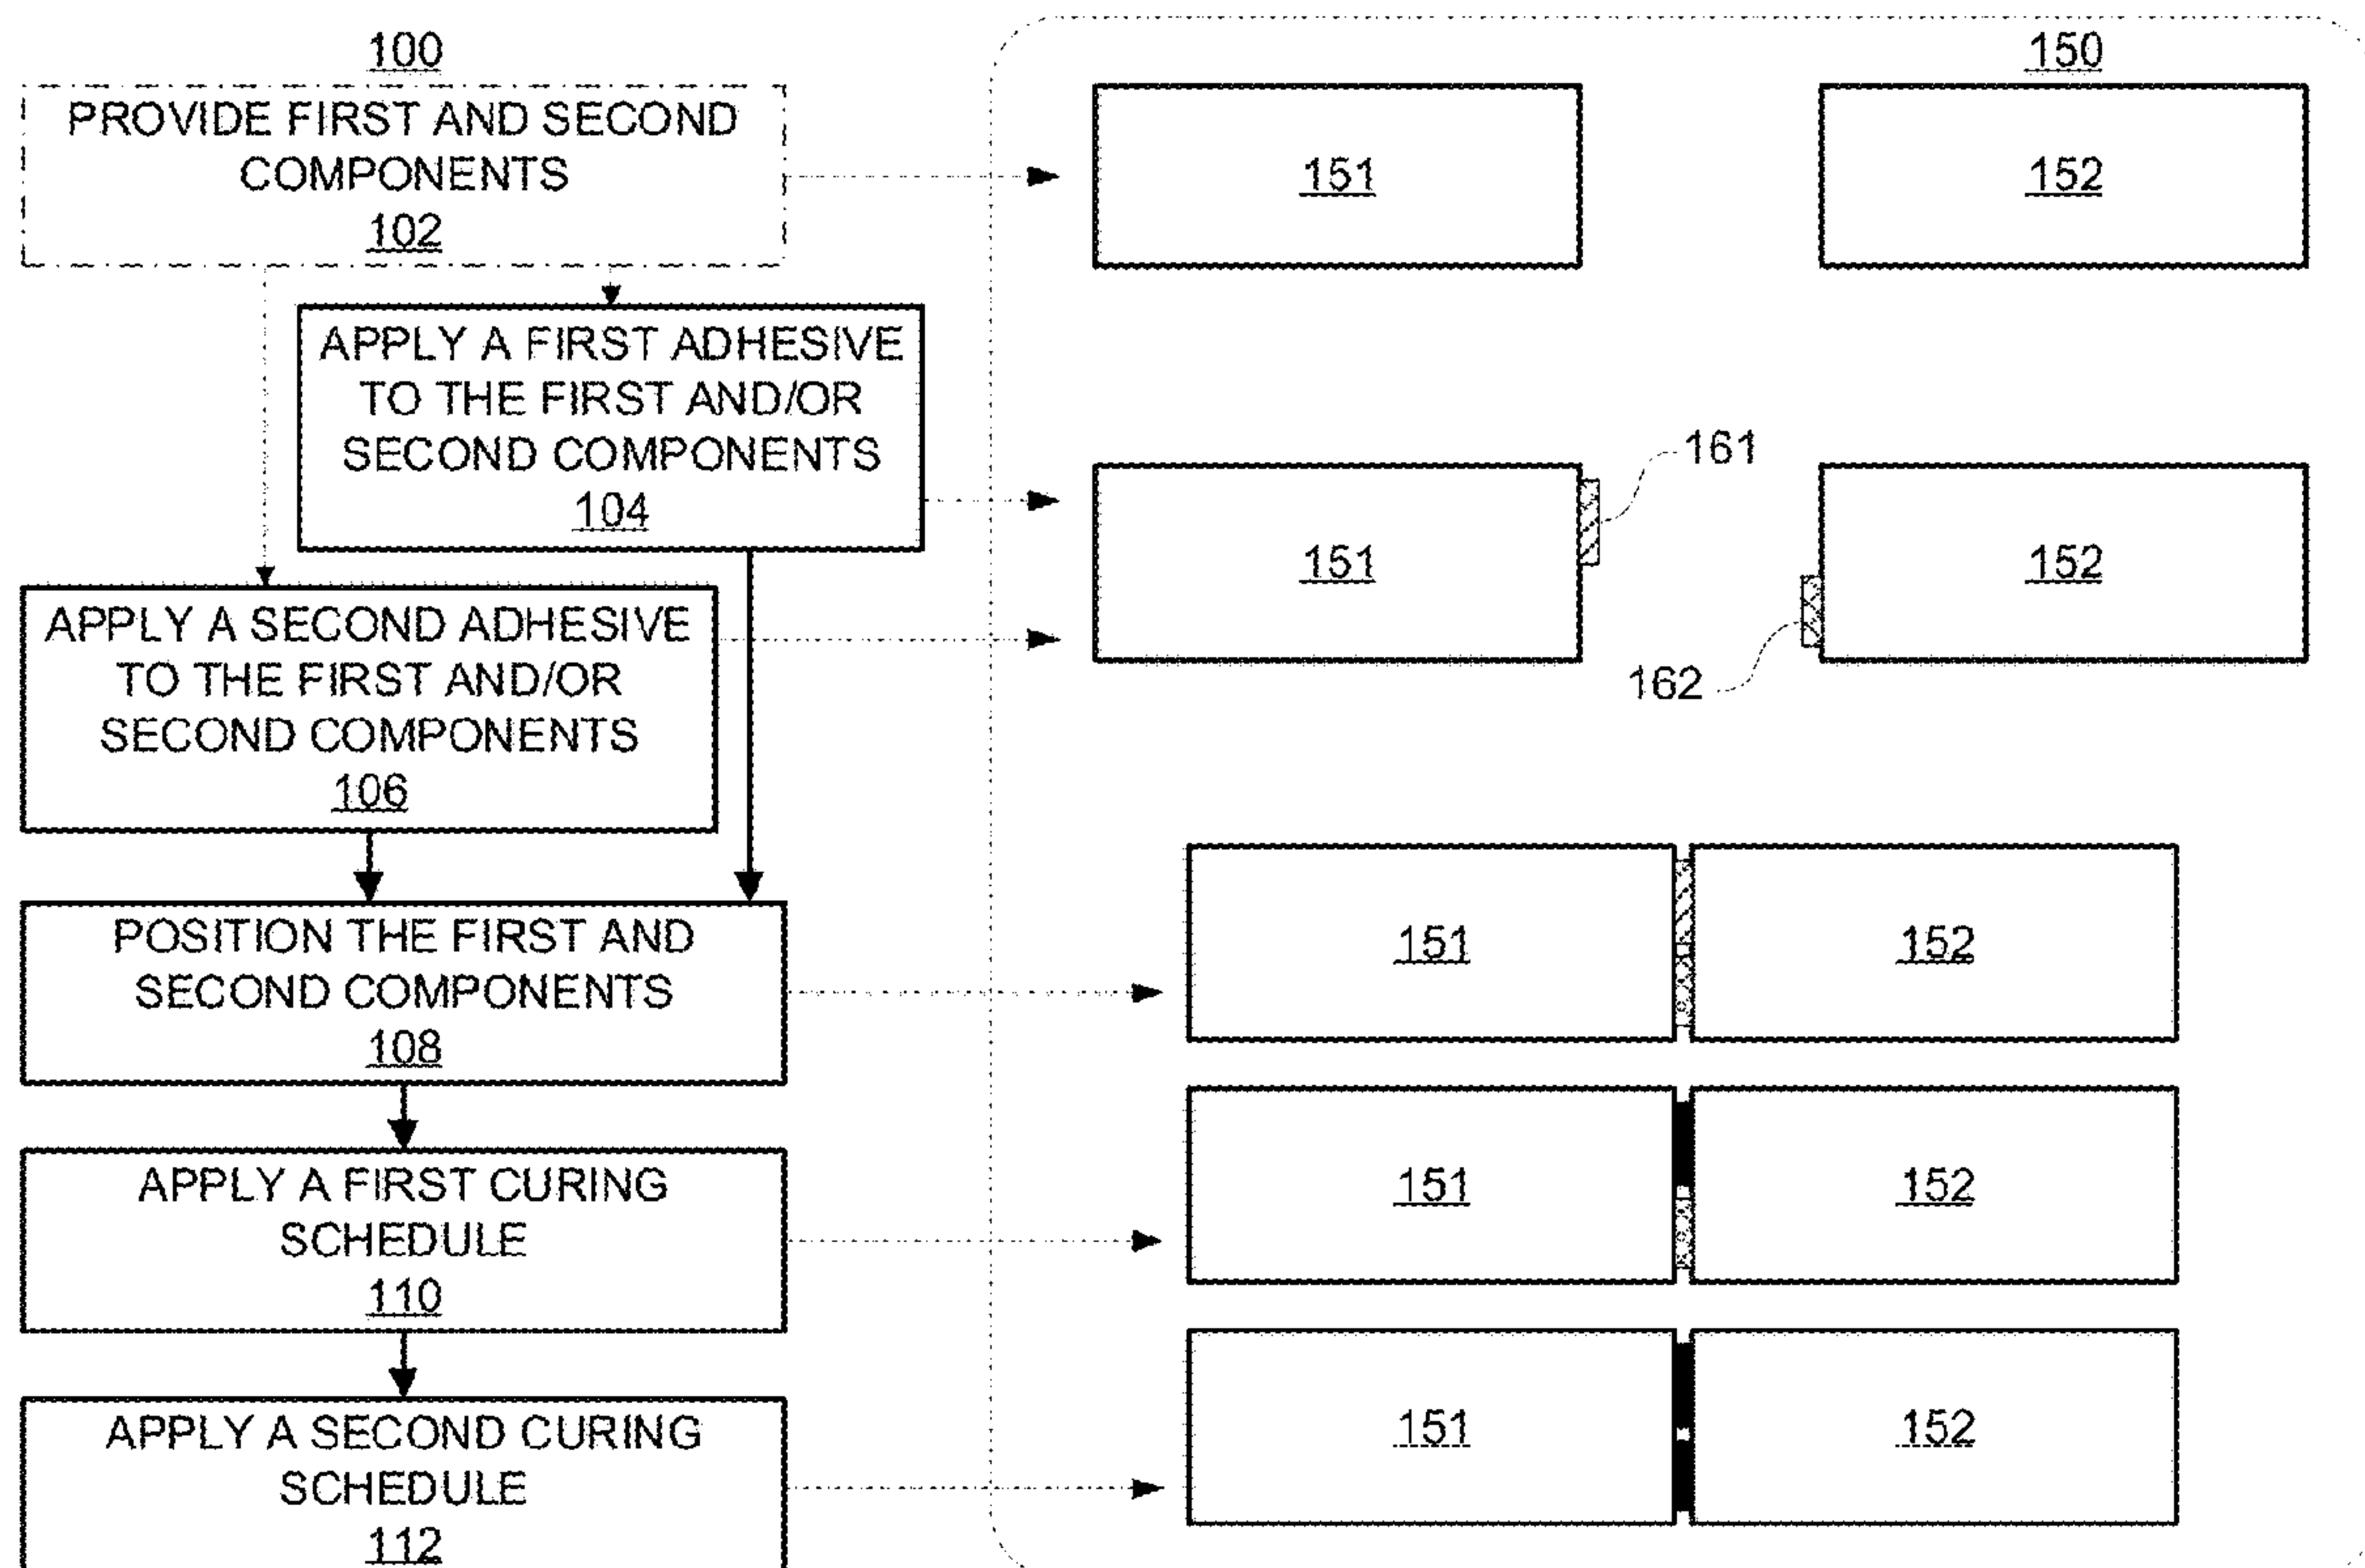

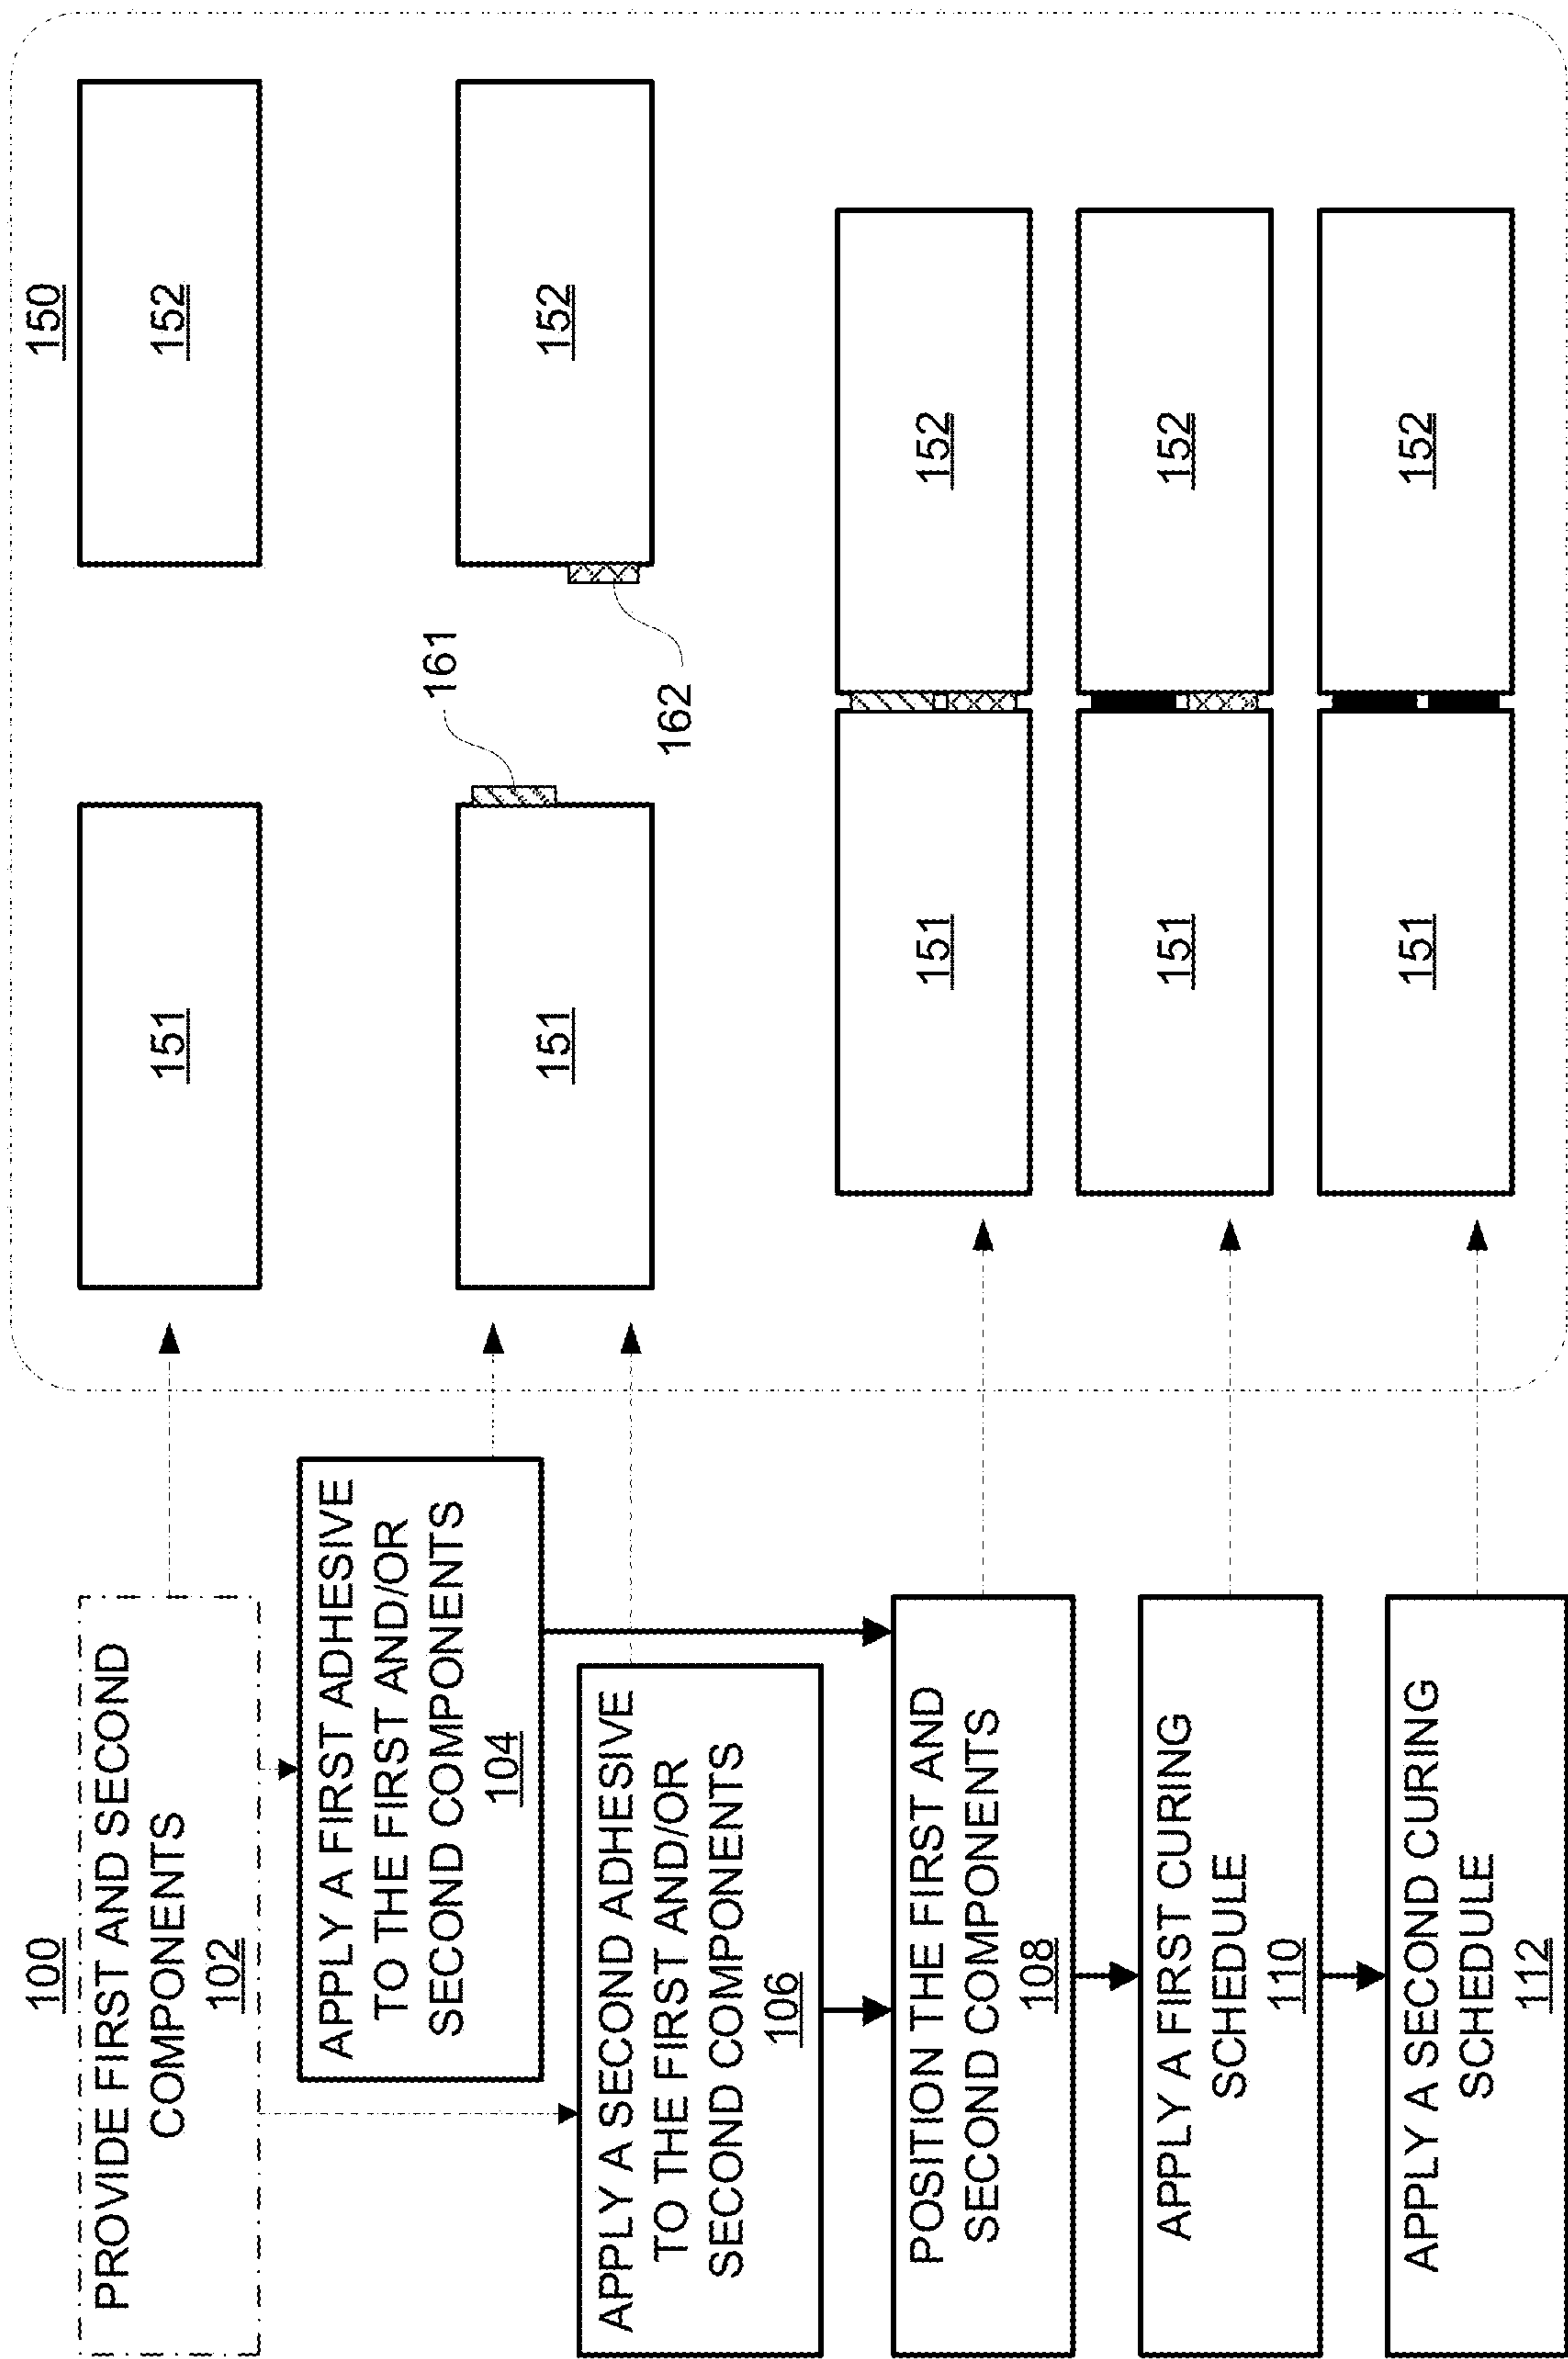
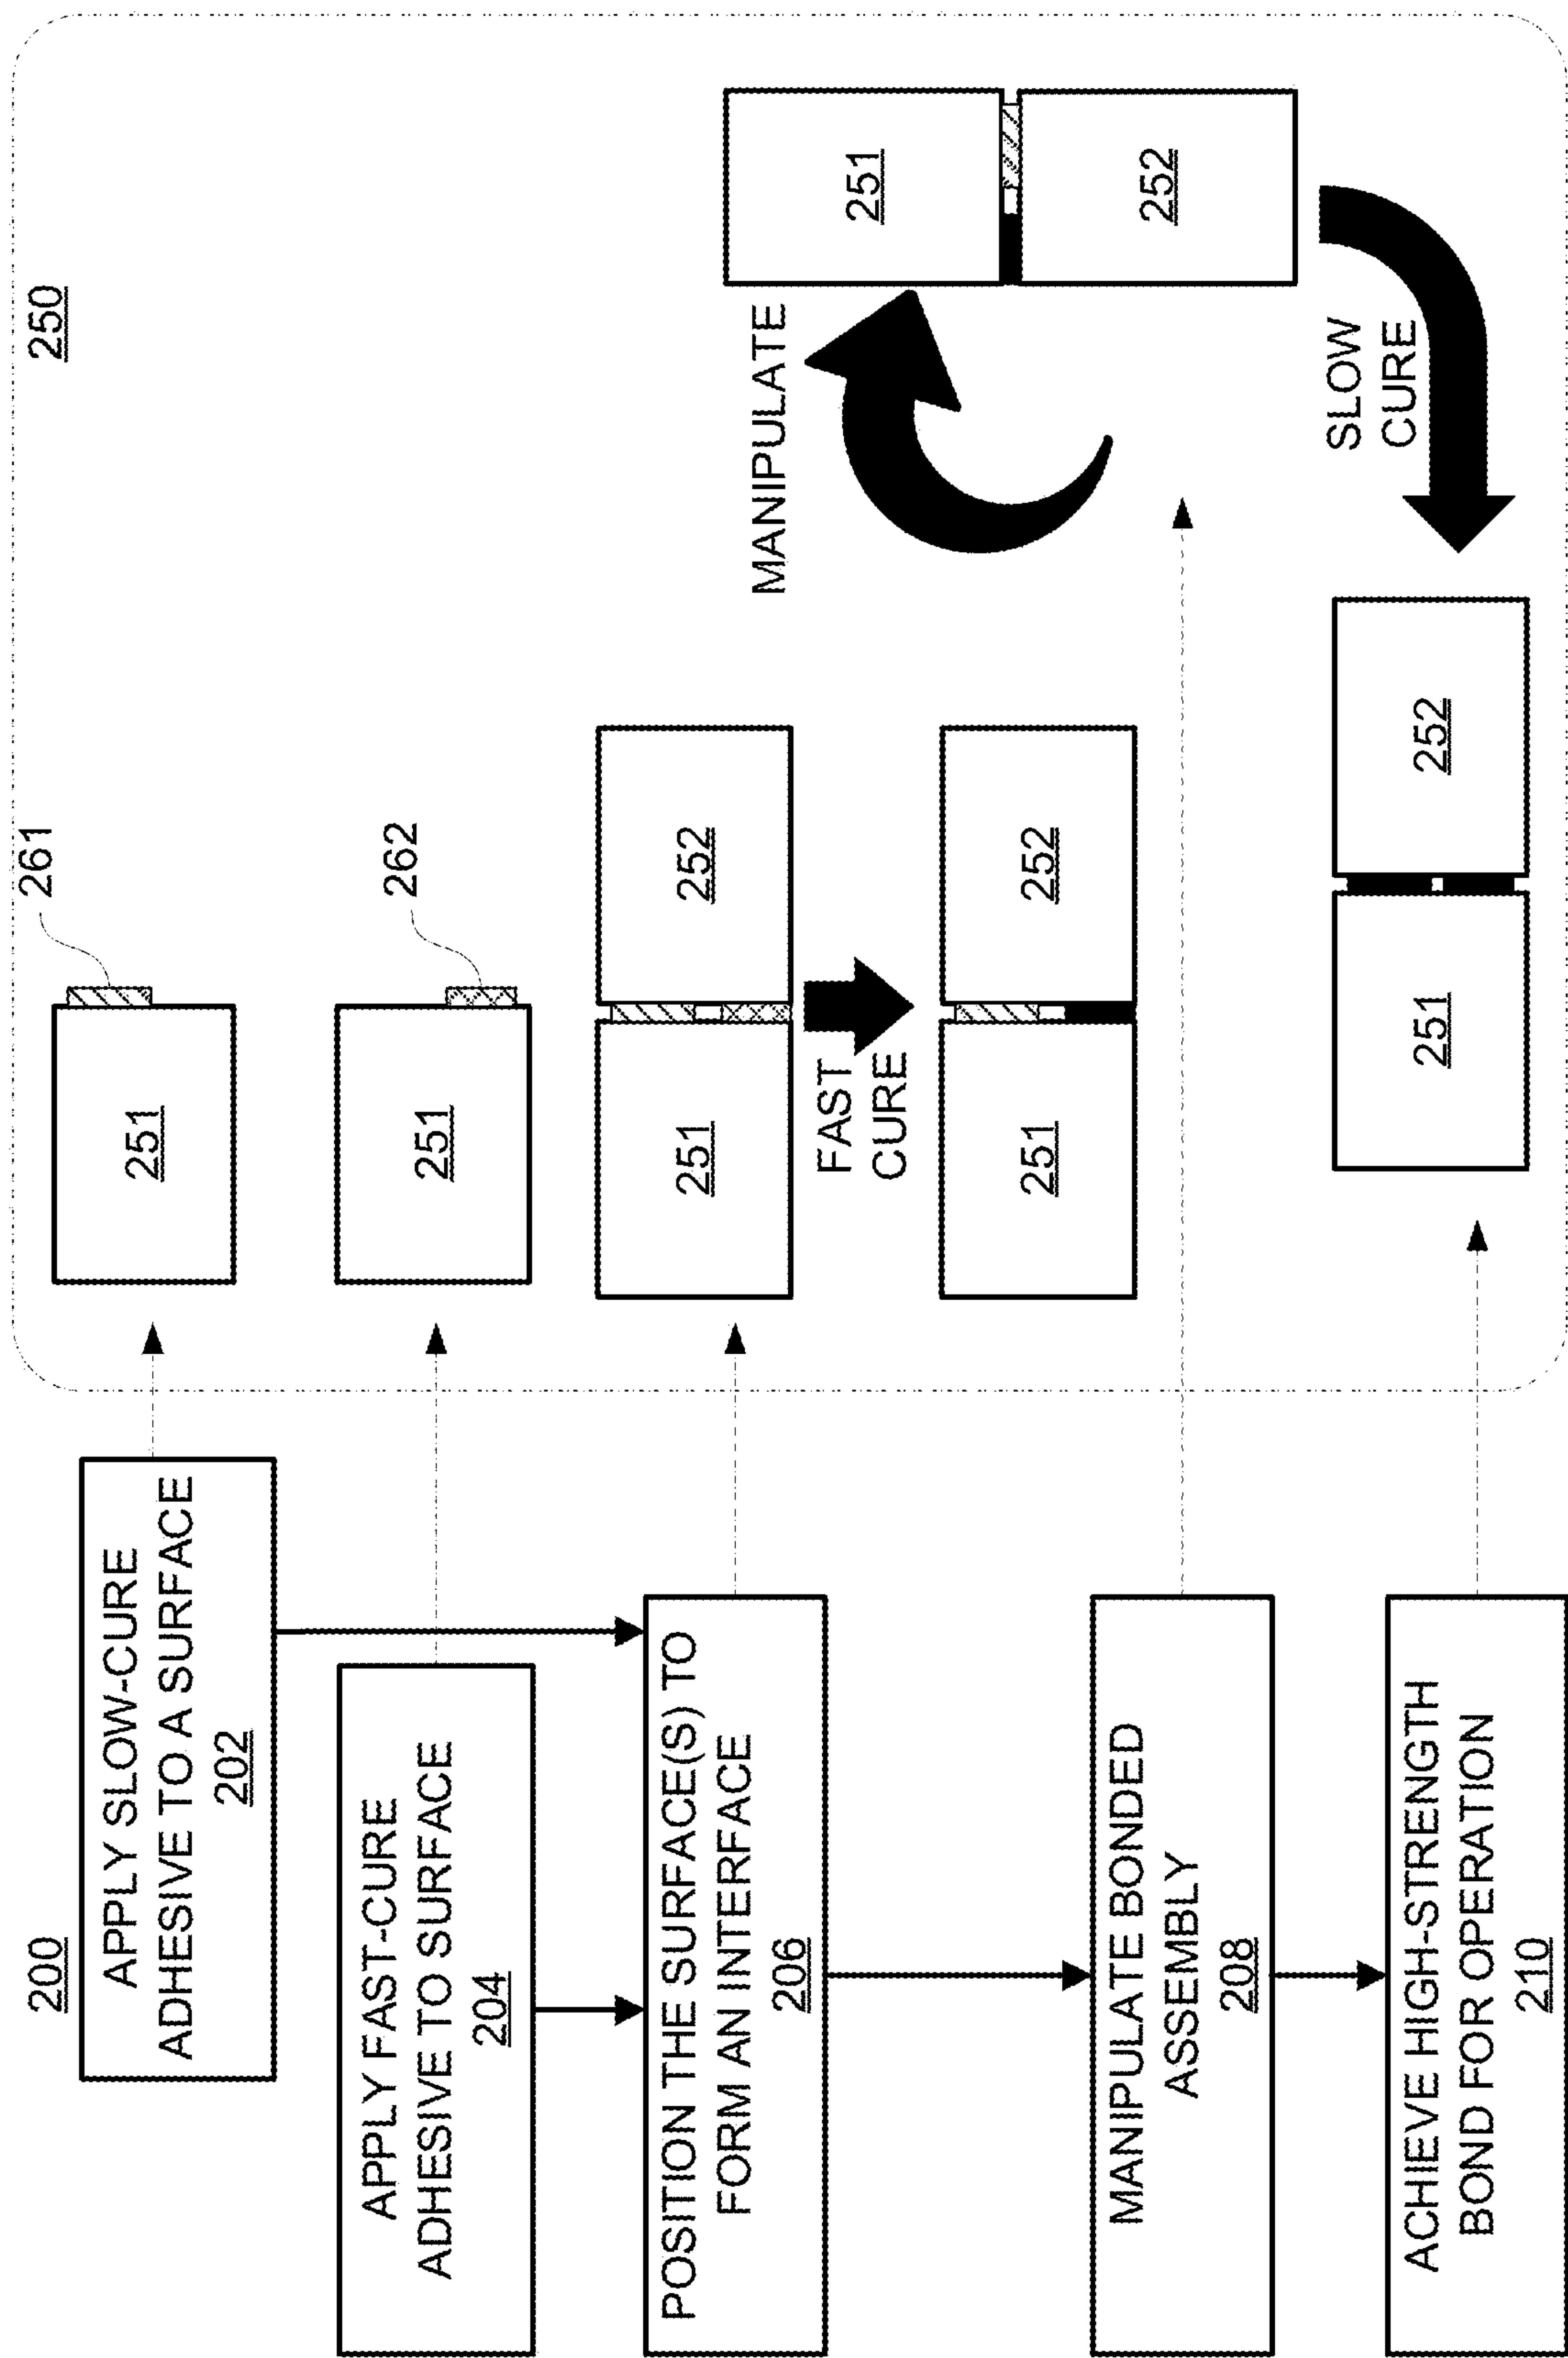


FIG. 1





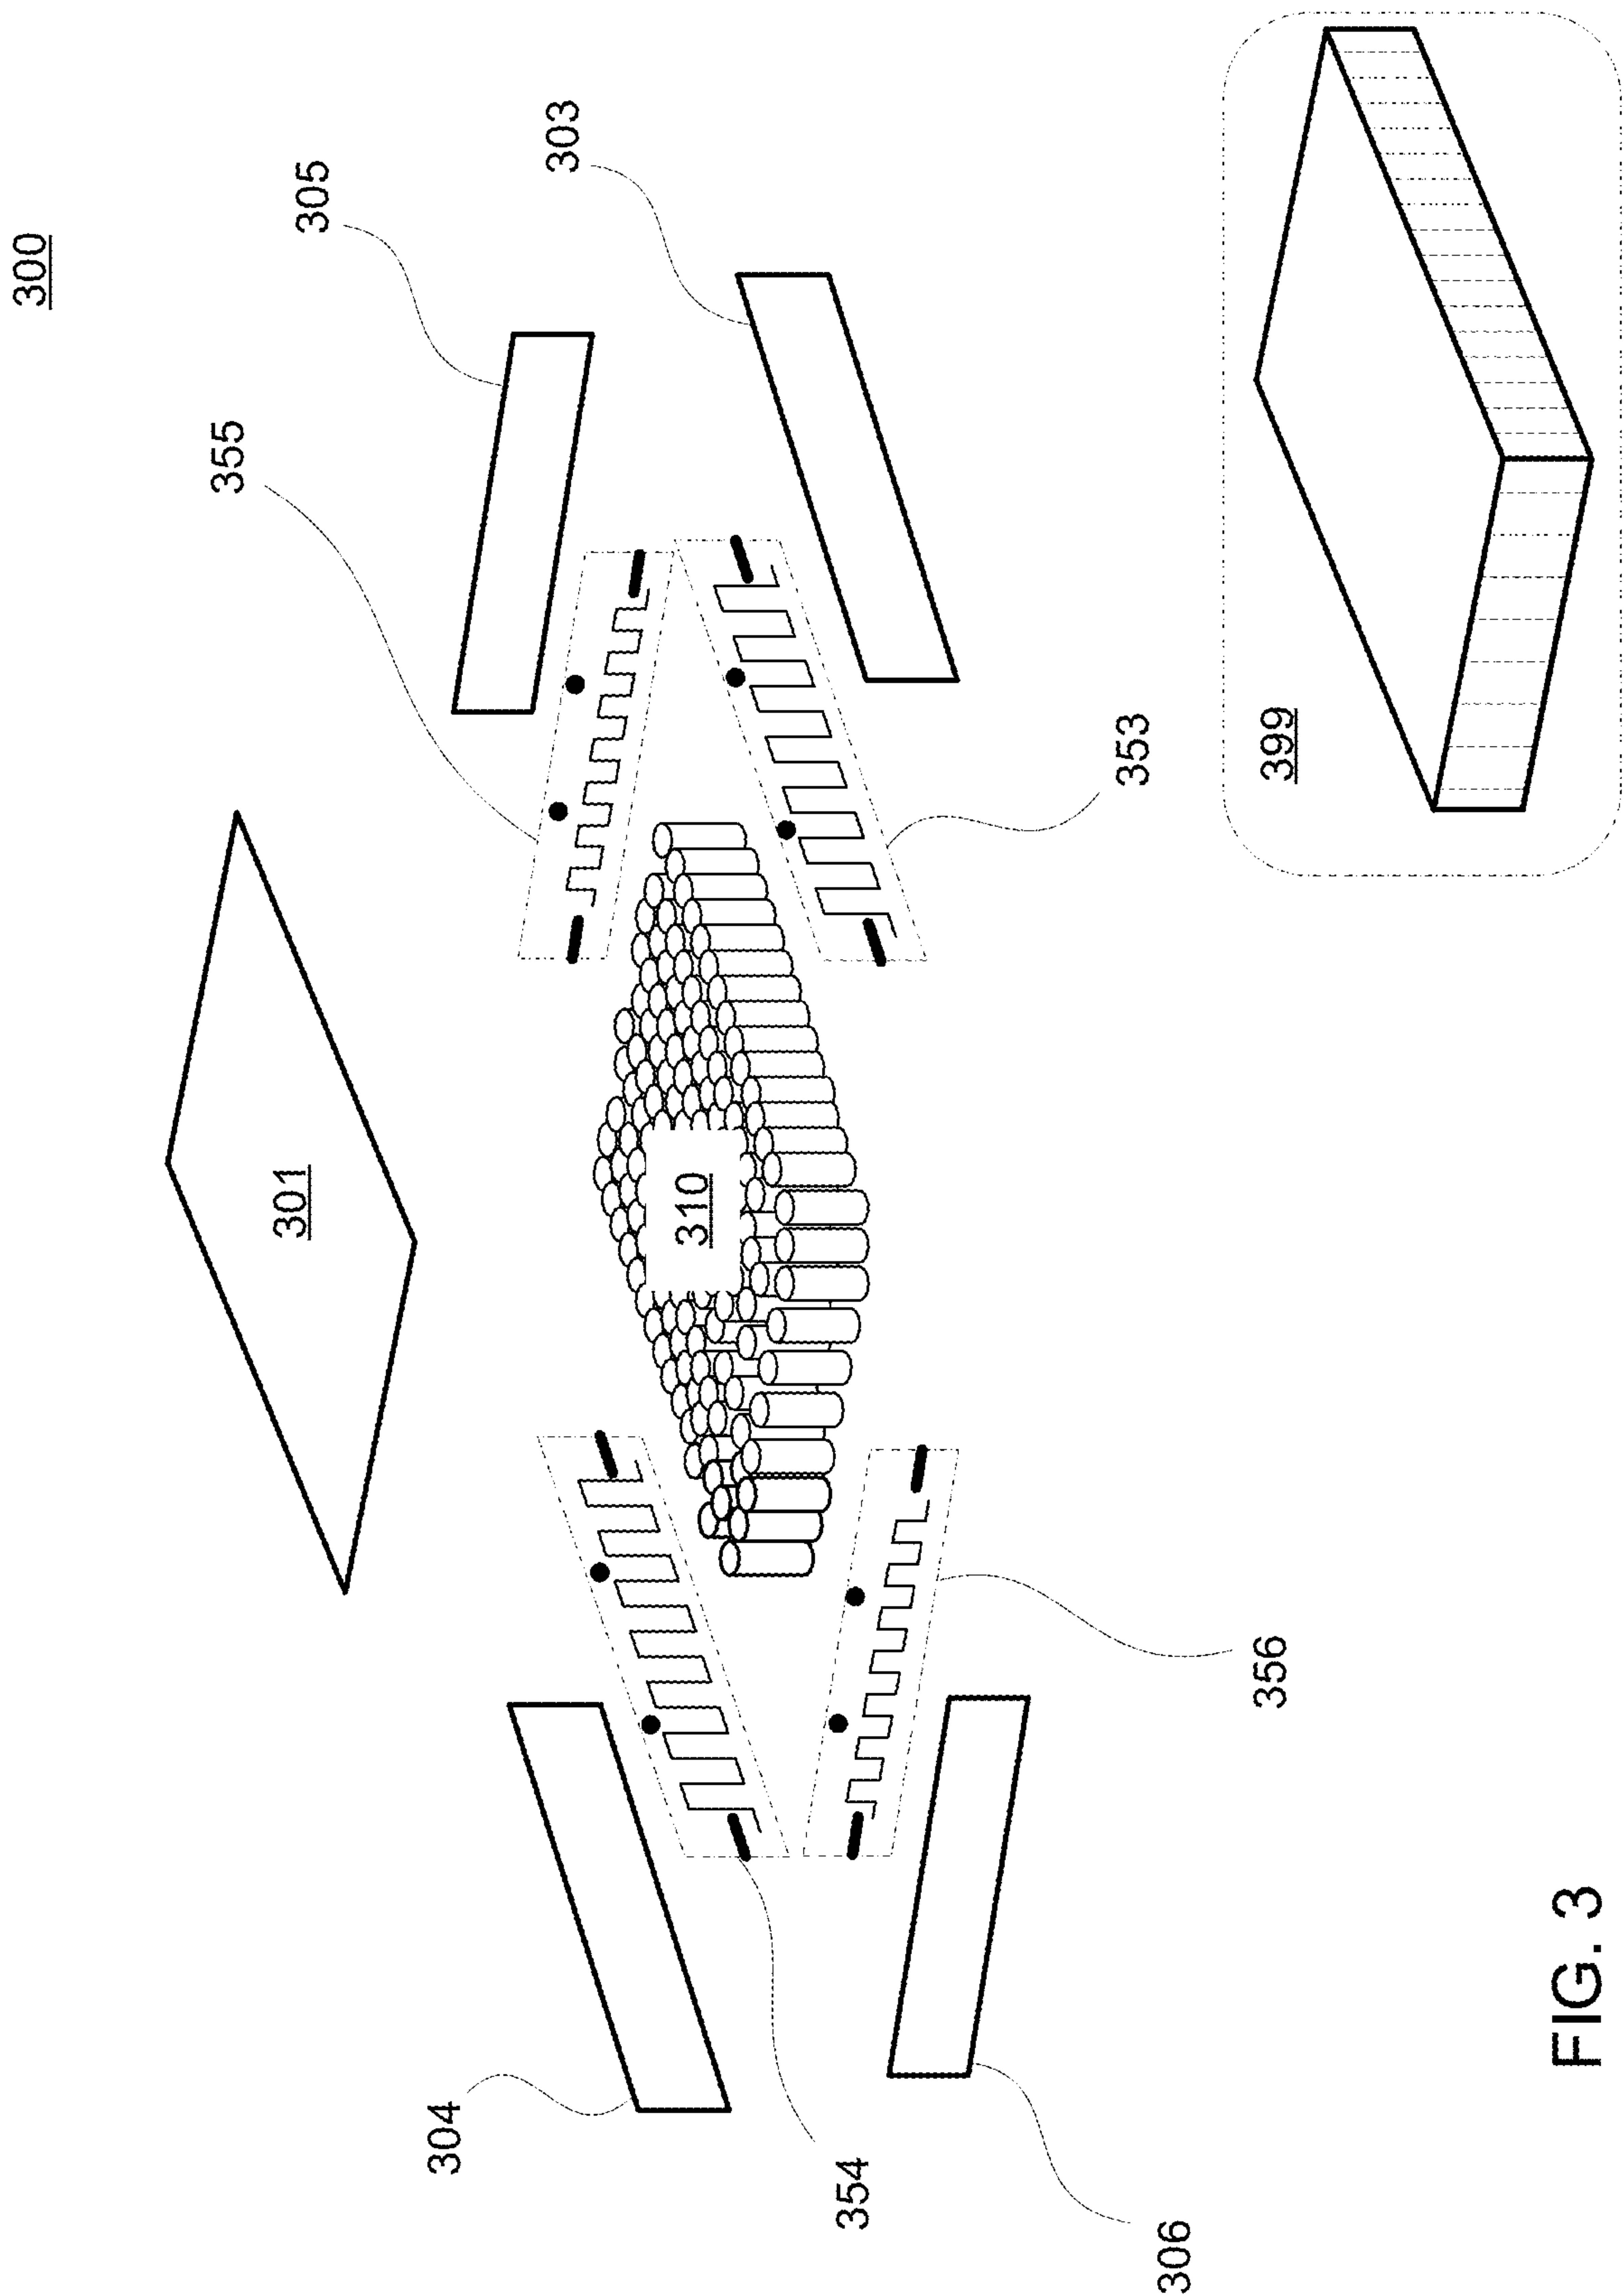


FIG. 3

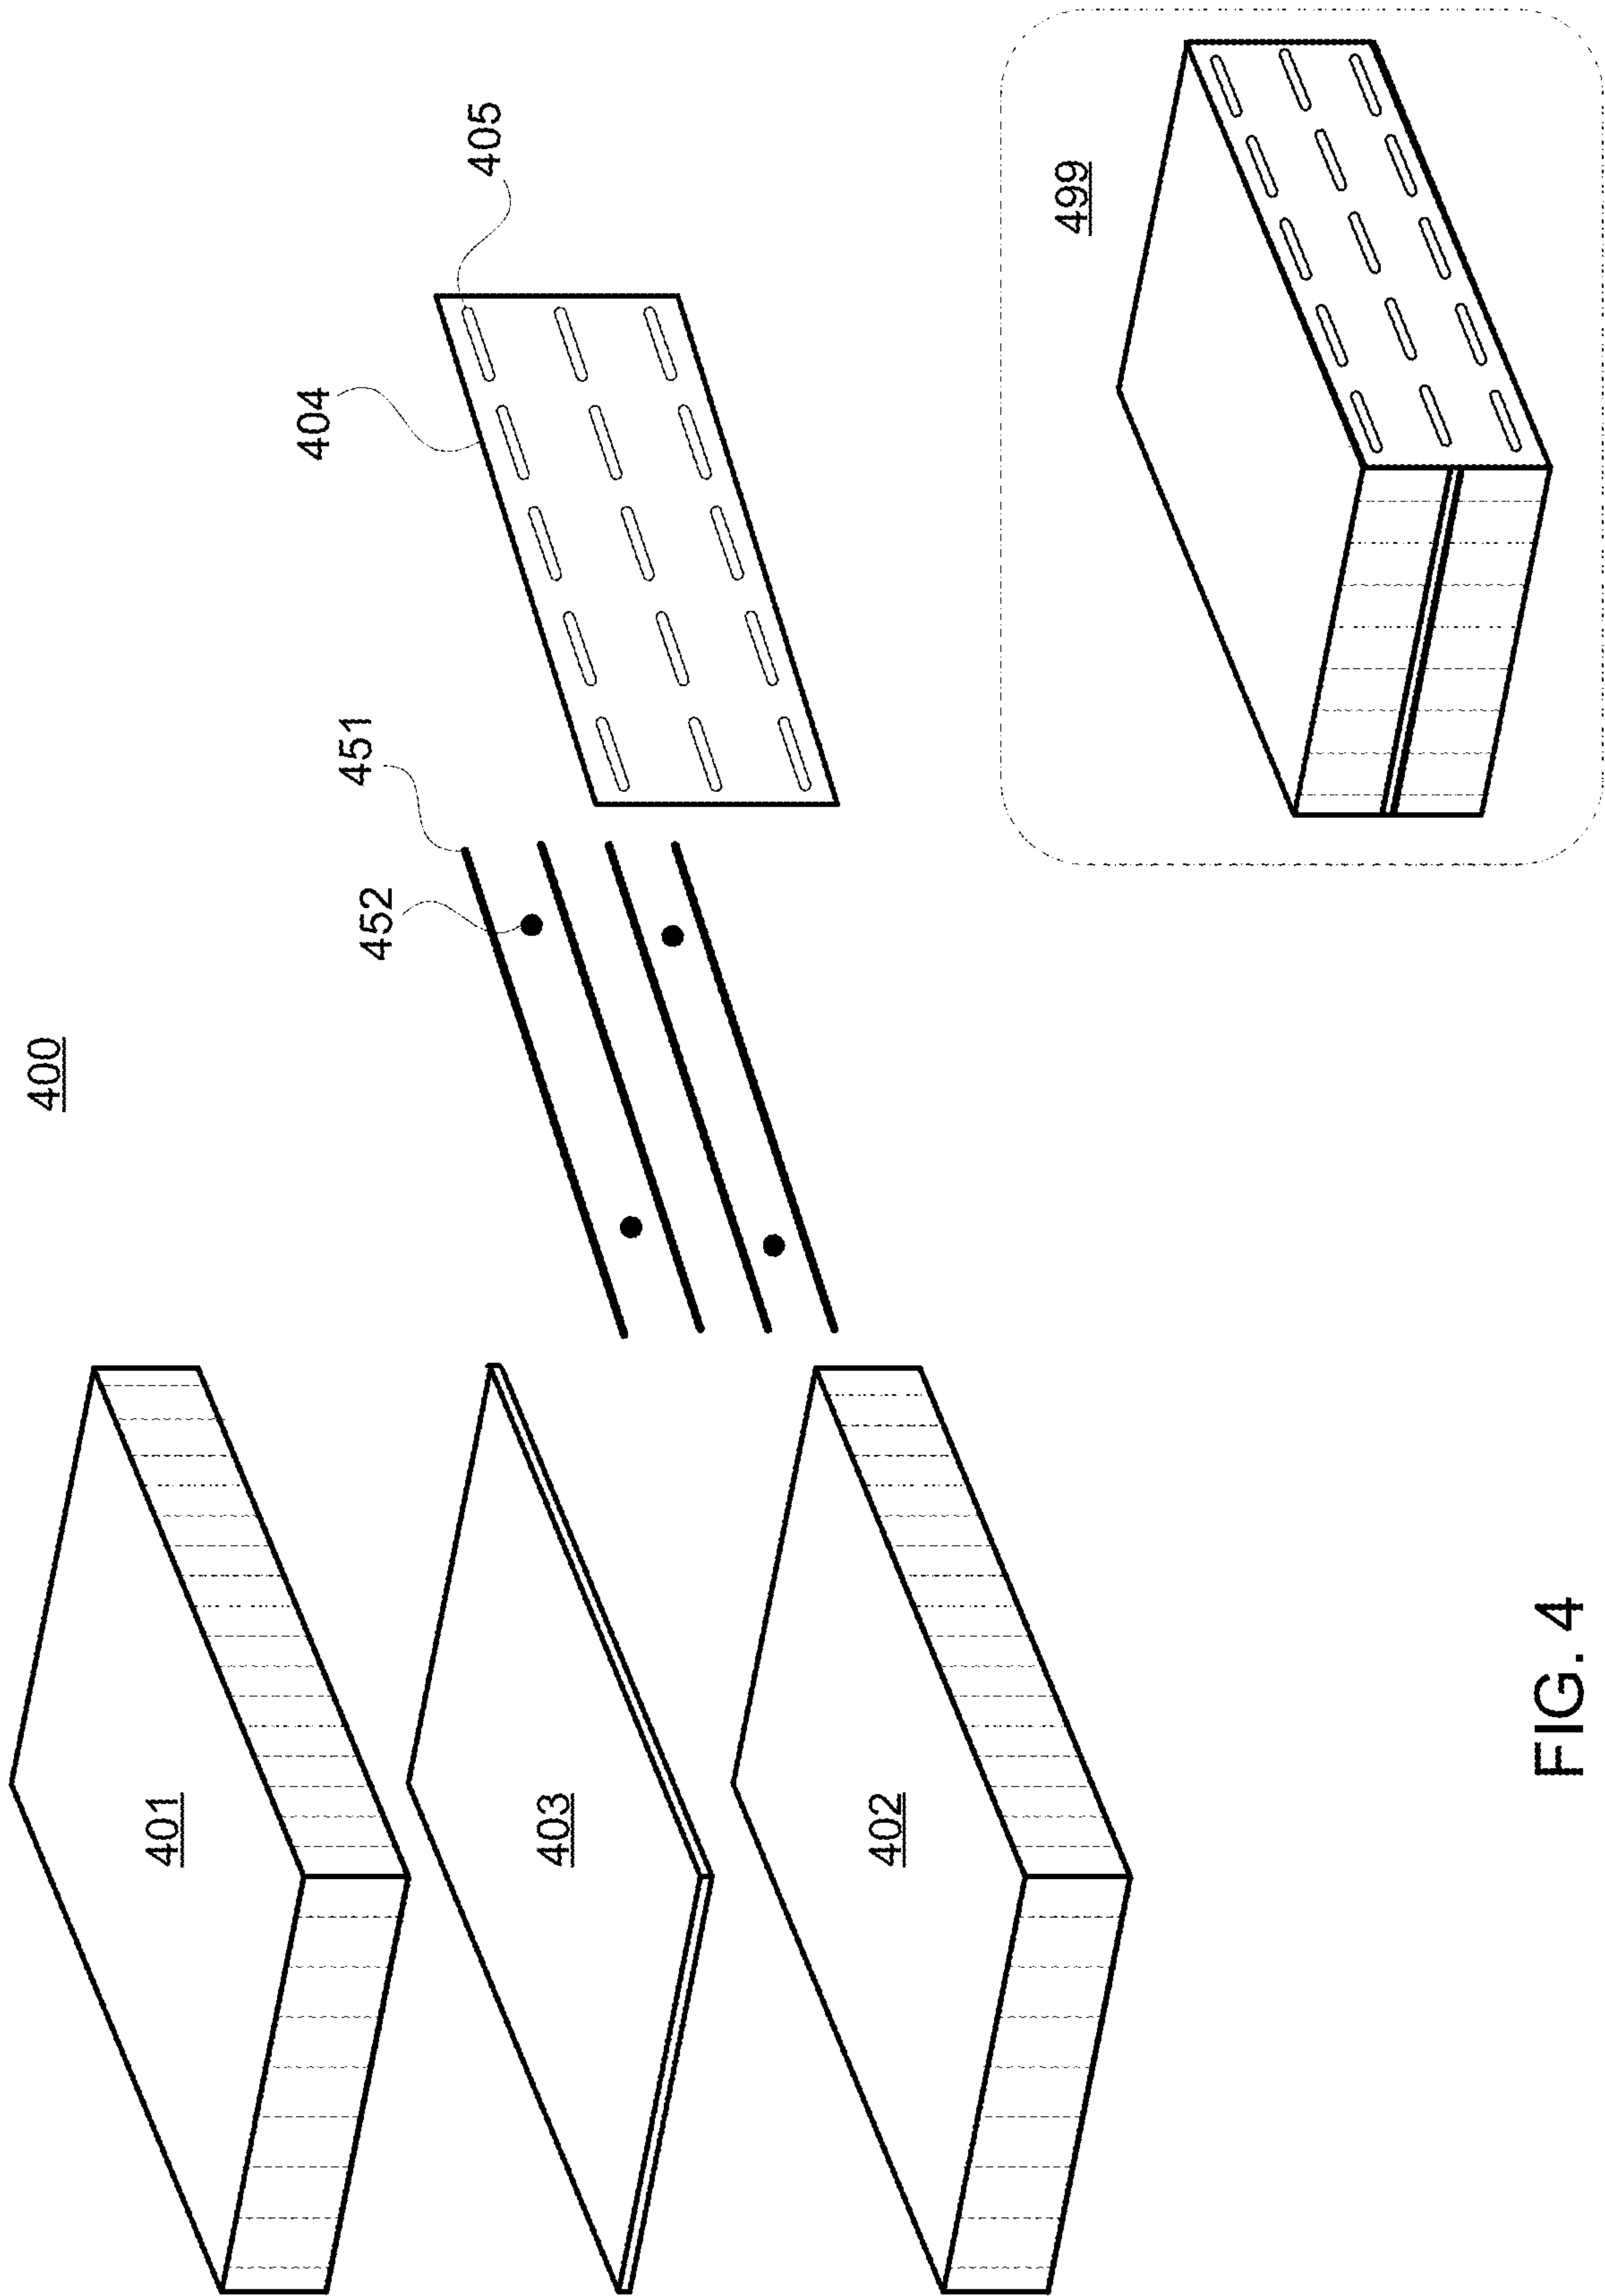

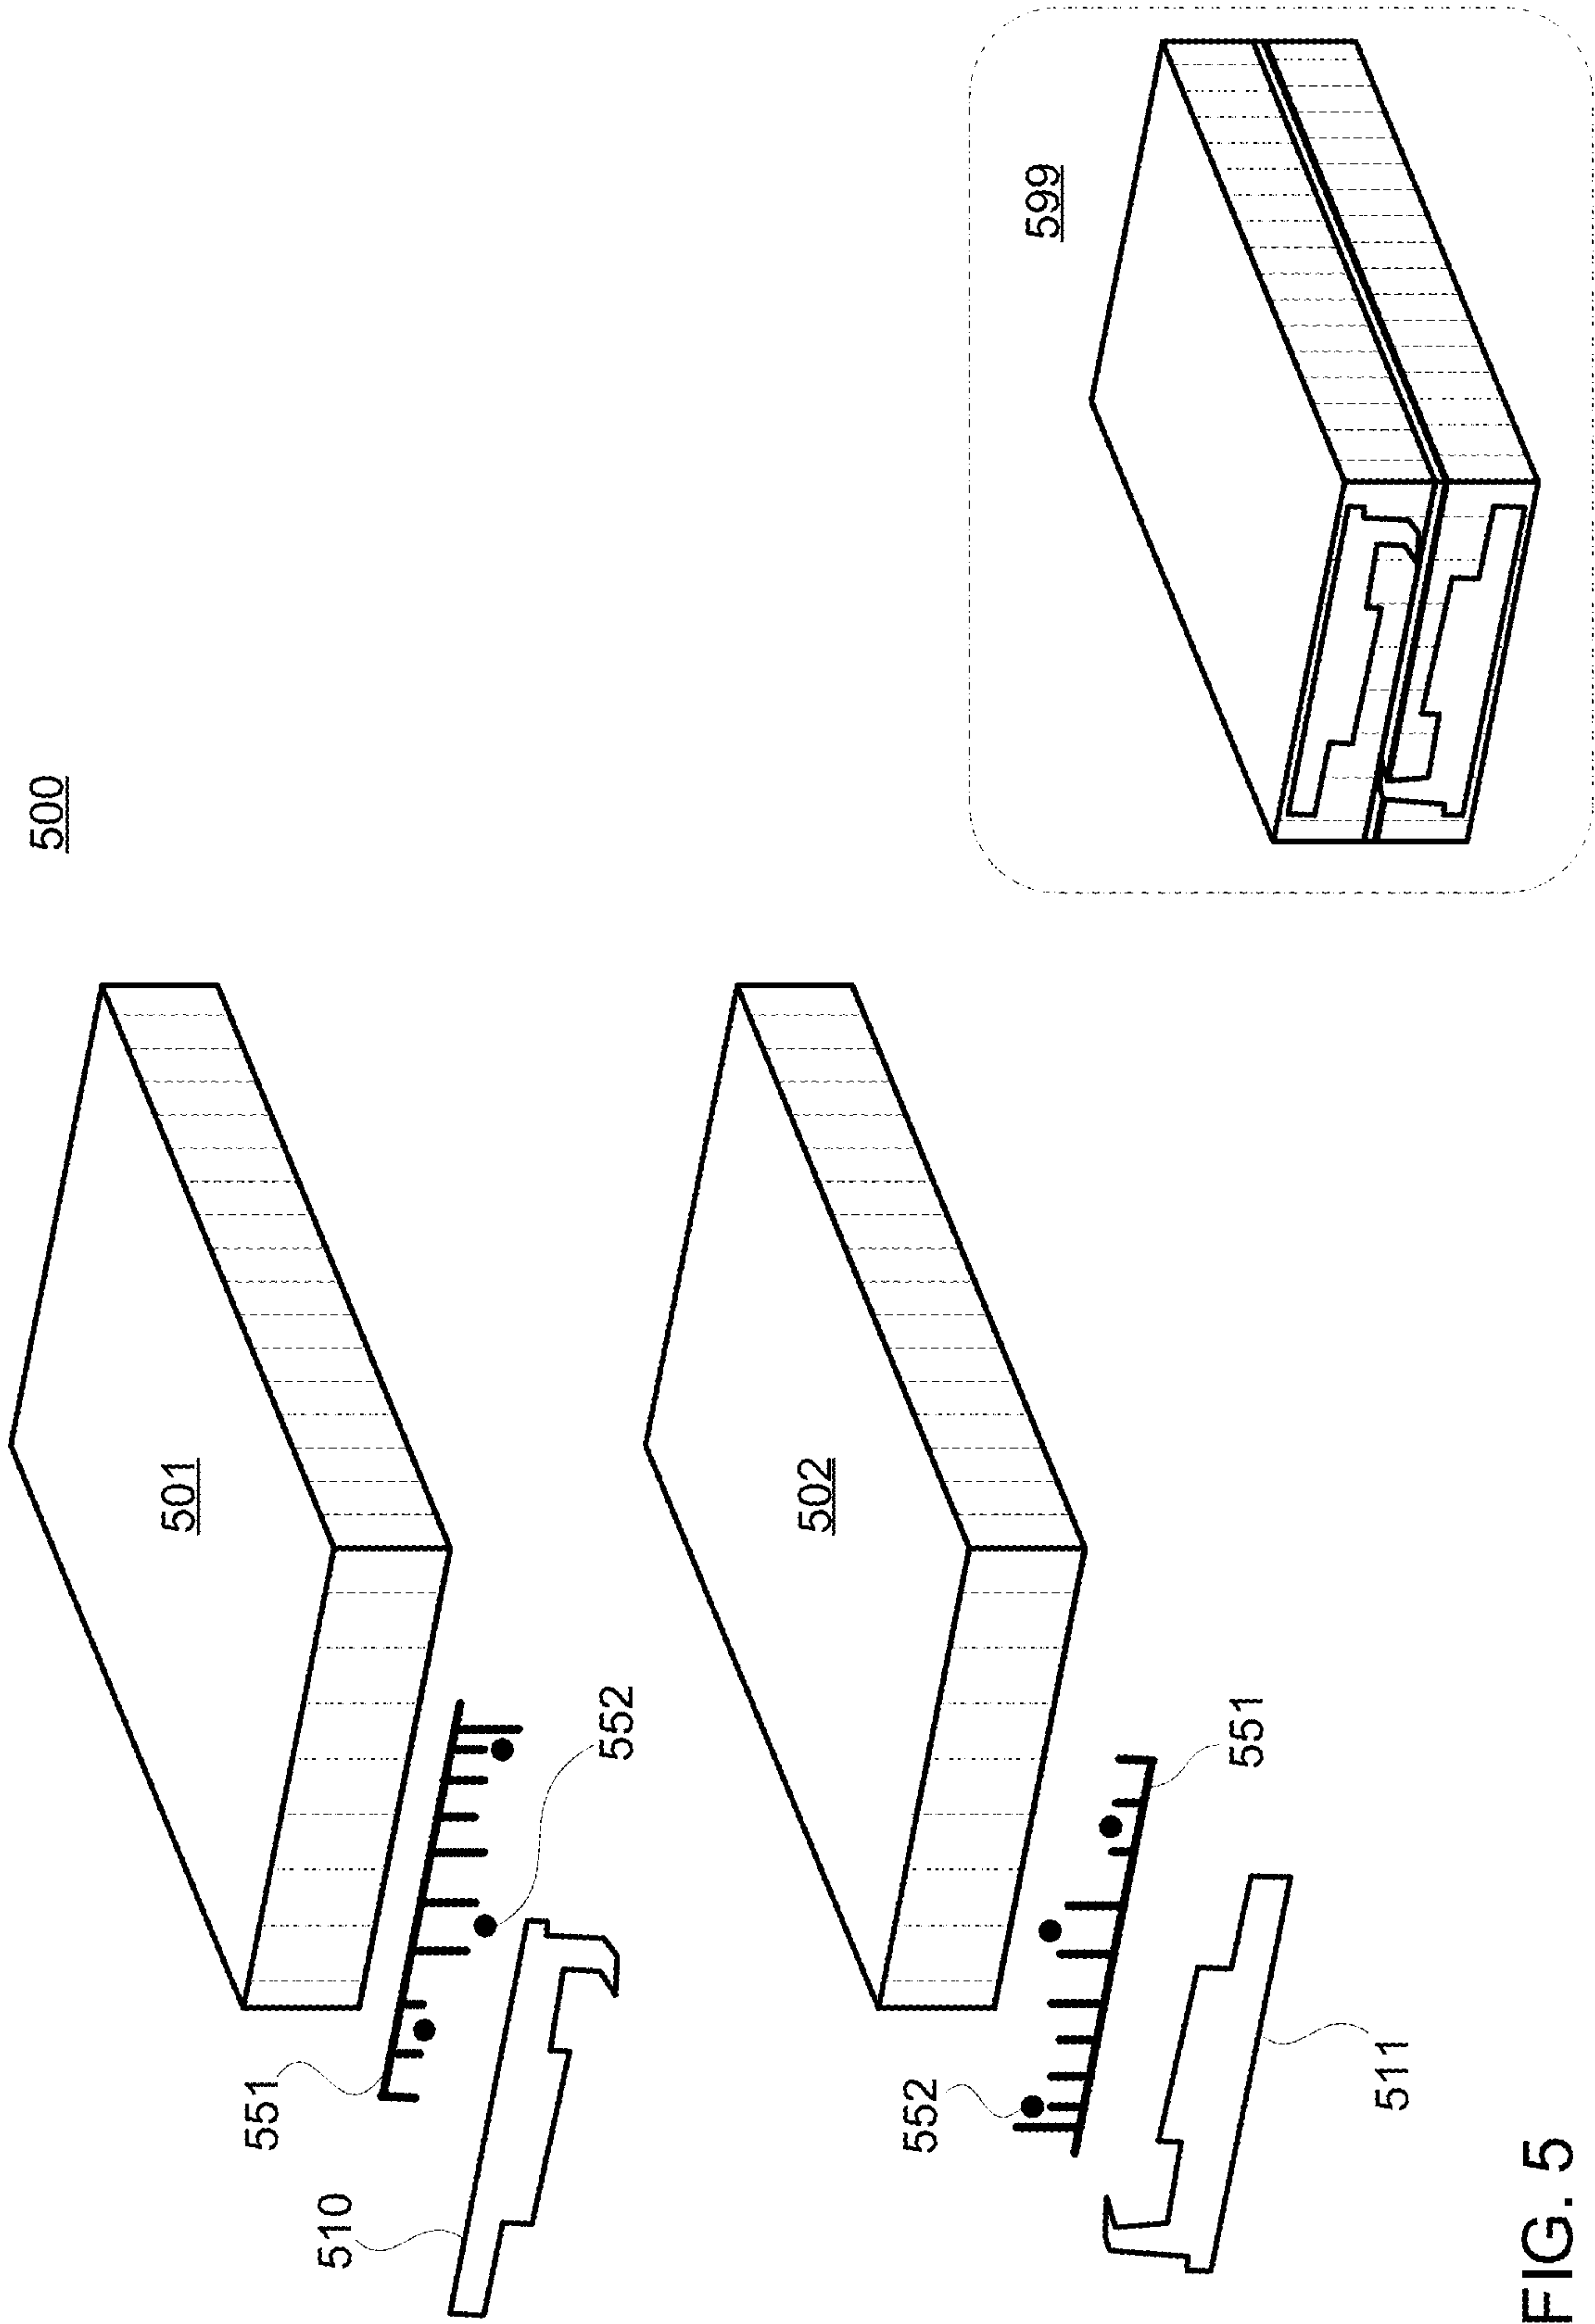

1

SYSTEMS AND METHODS FOR MANAGING
ADHESIVE JOINTS

INTRODUCTION

The present disclosure is directed to assembling battery systems using adhesives, and more particularly, to applying adhesives having different curing requirements to allow handling of components.

SUMMARY

In some embodiments, the present disclosure is directed to a method for making a battery system. The method includes applying a first adhesive to a first surface, applying a second adhesive to a second surface, positioning the first and the second surface to form an interface of the battery system, applying a curing schedule corresponding to the second adhesive to form an assembly, and performing a manufacturing process on the assembly after the curing schedule and while the first adhesive cures. The first adhesive is a one-part or two-part slow-curing adhesive having a first curing time, and the second adhesive is a fast-curing adhesive having a second curing time less than the first curing time. To illustrate, in some embodiments, the first adhesive includes a one-part thermoset epoxy adhesive or a two-part epoxy adhesive (e.g., that cures in 24 hours). The manufacturing process may include any suitable process for making a battery system after the first curing schedule is applied, including mechanical processes, electrical process, chemical processes, or a combination thereof.

In some embodiments, the first surface and the second surface do not overlap.

In some embodiments, the interface is between a plurality of battery cells and a sidewall, the first surface is at least one of a side of the plurality of battery cells or a side of the sidewall, and the second surface is at least one of a side of the plurality of battery cells or a side of the sidewall.

In some embodiments, the second adhesive is a UV-cure adhesive, and the sidewall includes a transmittance sufficient to allow UV light to pass through to UV-cure the second adhesive during the curing schedule.

In some embodiments, the interface is between a plurality of battery cells and a carrier, the first surface is at least one of an end of the plurality of battery cells or a side of the carrier, and the second surface is at least one of an end of the plurality of battery cells or a side of the carrier.

In some embodiments, the interface is between a busbar and a sidewall, the first surface is at least one of a surface of the busbar or a surface of the sidewall, and the second surface is at least one of a surface of the busbar or a surface of the sidewall. The busbar is configured to be electrically coupled to a plurality of battery cells, and the sidewall is configured to provide structural support to the plurality of battery cells.

In some embodiments, the interface is between a sidewall and a mounting bracket, such as a shear wall, the first surface is at least one of a surface of the sidewall or a surface of the mounting bracket, and the second surface is at least one of a surface of the sidewall or a surface of the mounting bracket. The sidewall is configured to provide structural support to the plurality of battery cells, and the mounting bracket is configured to provide structural support to the plurality of battery cells and the sidewall. In some embodiments, the mounting bracket includes one or more through features to allow the curing schedule of the second adhesive.

2

In some embodiments, performing the manufacturing process includes assembling more components, cleaning the assembly, inspecting the assembly, instrumenting the assembly, making battery connections (e.g., electrically coupling a plurality of battery cells to one or more busbars), any other suitable process, or any combination thereof. In some embodiments, performing the manufacturing process includes mechanically coupling a plurality of battery cells to a cooling plate.

To illustrate, in some embodiments, the method includes applying a first adhesive to a first area of an interface between a plurality of battery cells and a sidewall, applying a second adhesive to a second portion of the interface between the plurality of battery cells and the sidewall, positioning the sidewall adjacent to the plurality of battery cells, applying a curing schedule corresponding to the second adhesive to form an assembly that comprises the plurality of battery cells and the sidewall, and performing a manufacturing process on the assembly after the curing schedule and while the first adhesive cures. The first adhesive is a one-part or two-part slow-curing adhesive having a first curing time, and the second adhesive is a fast-curing adhesive having a second curing time less than the first curing time. In some embodiments, the first portion and the second portion do not overlap. To illustrate, in some embodiments, the second adhesive includes a fast-setting moisture-cure adhesive (e.g., a cyanoacrylate adhesive or other suitable adhesive), a UV-cure adhesive, or a combination thereof. In some embodiments, the first adhesive includes a two-part epoxy adhesive.

In some embodiments, the present disclosure is directed to a battery system. The battery system includes a plurality of battery cells, a sidewall, a busbar, a mounting bracket, assembled using adhesives. The plurality of battery cells is arranged with an end of each battery cell lying substantially in a plane. The plurality of battery cells include a lateral surface and a planar surface including the end of each battery cell. For example, the end is an axial end, including a face opposite the battery cells' electric terminals. The sidewall is arranged adjacent to the lateral surface of the plurality of battery cells. The busbar is configured to couple a first subset of the plurality of battery cells in parallel with each other and in series with a second subset of the plurality of battery cells. The mounting bracket is arranged adjacent to the sidewall and is configured to provide structural support to the sidewall and to the plurality of battery cells. A first adhesive, having a first curing time, is applied to a first surface area between the plurality of battery cells and the sidewall. A second adhesive, having a second curing time less than the first curing time, is applied to a second surface area between the plurality of battery cells and the sidewall. In some embodiments, the second surface area and the first surface area do not overlap.

In some embodiments, the second adhesive includes a UV-cure adhesive. In some embodiments, the second adhesive includes a fast-setting moisture-cure adhesive (e.g., a cyanoacrylate adhesive).

In some embodiments, the first adhesive is applied to a third surface area in an interface between the sidewall and the mounting bracket, and the second adhesive is applied to a fourth surface area in an interface between the sidewall and the mounting bracket that does not overlap the third surface area.

In some embodiments, the first adhesive is applied to a third surface area in an interface between the sidewall and the busbar, and the second adhesive is applied to a fourth

surface area in an interface between the sidewall and the busbar that does not overlap the third surface area.

BRIEF DESCRIPTION OF THE DRAWINGS

The present disclosure, in accordance with one or more various embodiments, is described in detail with reference to the following figures. The drawings are provided for purposes of illustration only and merely depict typical or example embodiments. These drawings are provided to facilitate an understanding of the concepts disclosed herein and shall not be considered limiting of the breadth, scope, or applicability of these concepts. It should be noted that for clarity and ease of illustration these drawings are not necessarily made to scale.

FIG. 1 shows a flowchart of an illustrative process for adhering components of a battery module using adhesives, in accordance with some embodiments of the present disclosure;

FIG. 2 shows a flowchart of an illustrative process for applying fast-cure and slow-cure adhesives to allow manipulation of components of a battery module, in accordance with some embodiments of the present disclosure;

FIG. 3 shows an exploded perspective view, and an assembled perspective view, of an illustrative battery module assembled using adhesives, in accordance with some embodiments of the present disclosure;

FIG. 4 shows an exploded perspective view, and an assembled perspective view, of an illustrative battery system assembled using adhesives, in accordance with some embodiments of the present disclosure; and

FIG. 5 shows an exploded perspective view, and an assembled perspective view, of an illustrative battery system having busbars assembled using adhesives, in accordance with some embodiments of the present disclosure.

DETAILED DESCRIPTION

The present disclosure is directed to the manufacturing of battery modules using adhesives. In some embodiments, battery module components are assembled using only adhesives, rather than fasteners or other affixments, to provide bonding and structural support. Selection of the adhesives used may be based on surface type and material, curing constraints, required bonding strength, conductive properties (e.g., thermal and electrical), any other suitable material properties, or a combination thereof. For example, while it may be desirable to use highest strength adhesives possible at all joints, some components of a battery module may be temperature-sensitive, thus limiting the types of curing schedules that can be accommodated. To illustrate, the highest-strength class of adhesives, which include thermosets requiring baking at high temperature, might not be viable contenders for use in a battery module due to constraints from temperature sensitivity of the battery cells. Other adhesives include two-part mixed adhesive that cure after mixing of two parts. However, as opposed to heat, these two-part adhesives typically require time (e.g., on the order of minutes) to cure sufficiently to allow handling of the work piece (e.g., for subsequent manufacturing steps). Instant-cure type adhesives such as, for example, moisture-cure adhesives or UV adhesives cured with UV light, cure on the order of seconds but lack sufficient strength in design and tend to be more brittle. Accordingly, it is desirable to design adhesive joints of a battery module in such a way that utilizes high strength adhesives while allowing manufactur-

ing to quickly handle a workpiece after marrying two parts held together with the adhesive joint.

FIG. 1 shows a flowchart of illustrative process 100 for adhering components of a battery module using adhesives, in accordance with some embodiments of the present disclosure. Panel 150 of FIG. 1 illustrates bonding of components 151 and 152 using process 100. In some embodiments, process 100 allows the selective and strategic use of an instant-cure adhesive and a high-strength, one-part or two-part, room-temperature curing adhesive for high strength and quick handling of a work piece (e.g., the bonded assembly including components 151 and 152).

Step 102 includes one or more of selecting, retrieving, arranging, or preparing (e.g., cleaning, etching, coating), or otherwise providing first and second components to be assembled. In an illustrative example, the first and second components may include a plurality of battery cells, one or more side walls, one or more carriers, one or more cooling plates, any other suitable component, or any combination thereof. As illustrated, component 151 and component 152 may include any suitable components of a battery module. The first and second components may include metal surfaces, plastic surfaces, surfaces of any other suitable material, or any combination thereof. In some embodiments, more than two components may be provided at step 102. For example, in some circumstances, more than two components may be bonded together using process 100.

Step 104 includes applying a first adhesive to the first component, the second component, or both. The first adhesive may have a corresponding first curing schedule, or range thereof, that indicates over what conditions (e.g., time, temperature, irradiance, chemical environment) the first adhesive can be expected to cure. For example, the first adhesive may include a slow-cure adhesive or a fast-cure adhesive. At step 104, the first adhesive may be applied in any pattern or layout, covering any suitable area of the first component, the second component, or both. For example, the first adhesive may be applied along a path on a surface of the first component or second component. In some embodiments, the path is intended to provide bonding coverage at a desired location, bonding having at least a predetermined surface area, or a combination thereof. In some embodiments, the first adhesive is applied allowing for a second adhesive to be applied. For example, the first adhesive may be applied to a first surface area of a surface, leaving a second surface area uncovered that can accommodate a second adhesive (e.g., at step 106). As illustrated, first adhesive 161 is applied to component 151, although it will be understood that first adhesive 161 may be applied to component 151, component 152, or both.

Step 106 includes applying a second adhesive to the first component, the second component, or both. For example, the second adhesive may include a slow-cure adhesive or a fast-cure adhesive, different from the first adhesive. The second adhesive may have a corresponding second curing schedule, or range thereof, that indicates over what conditions (e.g., time, temperature, irradiance, chemical environment) the second adhesive can be expected to cure. For example, the second adhesive may include a slow-cure adhesive or a fast-cure adhesive. At step 106, the second adhesive may be applied in any pattern or layout, covering any suitable area of the first component, the second component, or both. For example, the second adhesive may be applied along a path on a surface of the first component or second component. In some embodiments, the path is intended to provide bonding coverage at a desired location, bonding having at least a predetermined surface area, or a

5

combination thereof. In some embodiments, the second adhesive is applied such that it does not overlap with the first adhesive. For example, the interface between the first component and the second component may include a surface area, of which a first portion is covered in the first adhesive and a second portion is covered in the second adhesive. As illustrated, second adhesive **162** is applied to component **152**, although it will be understood that second adhesive **162** may be applied to component **151**, component **152**, or both. In some embodiments, the second adhesive is a fast-curing, or instant-curing, adhesive and is applied after the first adhesive to prevent curing before the components can be positioned.

Step **108** includes positioning the first component and the second component. In some embodiments, step **108** includes arranging the first and second components in a desired configuration such that when the first and second adhesives cure, a desired assembly results. In some embodiments, the first component, second component, or both includes one or more locating features to allow more precise positioning during curing of the first and second adhesives. In some embodiments, step **108** includes pressing the first component and the second component together using a predetermined force/pressure, thickness of bonding layer (e.g., by deforming the adhesive to a desired thickness), hold time, or a combination thereof. As illustrated, components **151** and **152** may be brought into proximity such that they form an interface in which adhesives **161** and **162** are arranged.

Step **110** includes applying a first curing schedule, corresponding to the faster-curing adhesive of steps **104** and **106**. The first curing schedule may include a time duration, a temperature, a pressure (e.g., a contact pressure), an irradiation (e.g., UV irradiation provided by a suitable UV source), an ambient humidity condition, any other suitable condition for curing, or any combination thereof. For example, the first curing schedule may include a predetermined temperature threshold and a predetermined time duration. In an illustrative example, steps **108** and **110** may be performed concurrently, wherein the first and second components are positioned and held together while the first curing schedule is performed. The first curing schedule is relatively fast as compared to the second curing schedule of step **112**. The first curing schedule allows the first and second components to be bonded in seconds or minutes to allow handling and manipulation of the bonded assembly without having to wait for a full cure of the slower-curing adhesive. As illustrated, first adhesive **161** cures first, as indicated by the solid black fill in FIG. 1.

Step **112** includes applying a second curing schedule, corresponding to the slower-curing or later-curing adhesive of steps **104** and **106**. The second curing schedule may include a time duration, a temperature, a pressure (e.g., a contact pressure), an irradiation (e.g., UV irradiation provided by a suitable UV source), any other suitable condition for curing, or any combination thereof. For example, the second curing schedule may include a predetermined temperature threshold and a predetermined time duration. The second curing schedule allows the first and second components to be bonded strongly for operation, and may occur over a longer time scale than the first curing schedule of step **110**. Because the first curing schedule allows the bonded assembly to be manipulated, subsequent manufacturing processes can be applied to the assembly. As illustrated, second adhesive **162** cures second, as indicated by the solid black fill in FIG. 1.

In an illustrative example, referencing FIG. 1, the first adhesive may include a UV-cure adhesive, and the second

6

adhesive may include a two-part epoxy adhesive. While the second adhesive is stronger than the UV-cure adhesive, the second adhesive may take longer to cure. After positioning components **151** and **152**, the assembly is irradiated with UV light to set the first adhesive, thus providing structural support to the assembly while the second adhesive cures. Accordingly, component **151**, component **152**, or both may include holes, slots, opening, any other suitable features, or any combination thereof to allow curing. For example, either or both of components **151** or **152** may include holes or be made of material having sufficient transmittance to allow UV irradiation to reach adhesive **161**.

FIG. 2 shows a flowchart of illustrative process **200** for applying fast-cure and slow-cure adhesives to allow manipulation of components of a battery module, in accordance with some embodiments of the present disclosure. Panel **250** of FIG. 2 illustrates bonding of components **251** and **252** using process **200**. In some embodiments, process **200** represents an illustrative example of process **100** of FIG. 1.

Step **202** includes applying a slow-cure adhesive to a surface. The surface may include a surface of a first component, a second component, another component, or a combination thereof. As illustrated in panel **250**, slow-cure adhesive **261** is applied to a surface of component **251**. Because slow-cure adhesive **261** cures slowly, component **251** can be positioned without the adhesive curing prior to interfacing with component **252**. The slow-cure adhesive may include, for example, a two-part structural mix-cure acrylic adhesive that cures in the order of tens of minutes after mixing, a one-part or two-part epoxy adhesive that cures in the order of hours to days, any other suitable slow-cure adhesive, or any combination thereof.

Step **204** includes applying a fast-cure adhesive to a surface. The surface may include a surface of a first component, a second component, another component, or a combination thereof. As illustrated in panel **250**, fast-cure adhesive **262** is applied to a surface of component **252**. Because fast-cure adhesive **262** cures relatively quickly, components **251** and **252** are then positioned at step **206** in an intended assembled configuration. In some embodiments, the slow-cure adhesive of step **202** is applied over a first portion of an interface between the first and second components, and the fast-cure adhesive is applied over a second portion of the interface. For example, the slow-cure and fast-cure adhesives may each be applied as beads following a suitable path. The paths or coverage of the slow-cure and fast-cure adhesives need not cross or otherwise be coincident (e.g., the first and second portions may be separate and non-overlapping). The fast-cure adhesive may include, for example, UV-cure adhesives, cyanoacrylate adhesives, any other suitable adhesive that cures on the order of minutes or less, or any combination thereof. To illustrate, for example, adhesives of this type may be able to cure to 100% of their design strength within 2 minutes of marrying components **251** to **252** from exposure to either ambient humidity or ultraviolet radiation. In some embodiments, step **204** includes applying a curing schedule for the fast-cure adhesive. The curing schedule may include a period of time (e.g., waiting seconds or minutes for the moisture-cure adhesive to cure), applying a suitable irradiance (e.g., applying UV light to the fast-cure adhesive), exposing the adhesive to environmental conditions (e.g., ambient humidity, temperature), any other suitable process step, or any combination thereof.

In some embodiments, the fast-cure adhesive includes a UV-cure adhesive. For example, UV-cure adhesives may follow a radical-cure chemical polymerization that is initiated when a photo-initiator in the adhesive absorbs the UV

light that is irradiated on the sample, thus generating the first radicals that propagate the full polymerization. To illustrate, the fast-cure adhesive may include acrylic.

In some embodiments, the fast-cure adhesive includes a moisture-cure adhesive. For example, moisture-cure adhesives (e.g., including “super glue”) may polymerize when they are exposed to an acid. They may include a disbursed stabilizer while stored (e.g., on the shelf or in the bottle). When the adhesive is squeezed into a joint, the acid from water in the air (e.g., humidity) activates the stabilizer (e.g., resulting in curing). To illustrate, moisture-cure adhesives may include 2-ethyl-cyanoacrylate. In some embodiments, moisture-cure adhesives may include disbursed rubber improve toughness.

Step **206** includes positioning surfaces to form an interface of a bonded assembly. In some embodiments, step **206** includes arranging the first and second components in a desired configuration such that when the first and second adhesives cure, a desired assembly results. In some embodiments, step **206** includes positioning a first component and a second component. For example, in some embodiments, the first component, second component, or both includes one or more locating features to allow more precise positioning during curing of the first and second adhesives. In some embodiments, step **206** includes pressing two or more components together using a predetermined force/pressure, thickness of bonding layer (e.g., by deforming the adhesive to a desired thickness), hold time, or a combination thereof. As illustrated, components **251** and **252** may be brought into proximity such that they form an interface in which slow-cure adhesive **261** and fast-cure adhesive **262** are arranged.

Step **208** includes manipulating the bonded assembly. Step **208** may include, for example, re-positioning the bonded assembly (e.g., translating, rotating, or a combination thereof), bonding further components to the bonded assembly, electrically coupling or more components of the bonded assembly (e.g., battery cells welded via links to one or more busbars), arranging one or more busbars against the bonded assembly, arranging one or more structural components against the bonded assembly, preparing one or more surfaces of the bonded assembly, any other suitable processing or manufacturing step, or any combination thereof. In some embodiments, step **208** includes applying a force or stress load that is less than that experienced, or expected to be experienced, by a finished assembly in operation (e.g., where the finished assembly includes the bonded assembly). As illustrated, fast-cure adhesive **262** cures first, as indicated by the solid black fill in FIG. 2 (e.g., after positioning at step **206** and before manipulation at step **208**).

Step **210** includes achieving high-strength bond for operation. The high strength bond is provided by curing the slow-cure adhesive of step **202**. In some embodiments, step **210** includes applying a curing schedule for the slow-cure adhesive. The curing schedule may include a period of time (e.g., waiting minutes or hours for the slow-cure adhesive to cure), applying a suitable environmental condition (e.g., temperature, humidity), any other suitable process step, or any combination thereof. Step **210** may occur before, during, or after manipulation of the bonded assembly at step **208**. In some embodiments, step **210** may occur over a relatively long time scale (e.g., hours to days) to completely cure the slow-cure adhesive, over which time any suitable manipulation of the bonded assembly may occur. As illustrated, slow-cure adhesive **261** cures after fast-cure adhesive **262**, as indicated by the solid black fill in FIG. 2 (e.g., after manipulation at step **208** and before operation).

In some embodiments, process **200** includes using both an instant-cure adhesive and a two-part high-strength adhesive (e.g., on the same joint) to achieve quick curing for work-piece manipulation and longer-term curing for a higher strength bond. In some embodiments, process **200** allows a decrease in manufacturing time for assembling battery modules, eliminates the need for buffering zones that allow curing of the high-strength adhesive (e.g., thus saving room on the manufacturing floor), eliminates the need for expensive and complex tooling to hold parts in place while the high-strength adhesive cures, or a combination thereof.

In an illustrative example, processes **100** and **200** may be applied to any high-strength joint that needs to be generated (e.g., in a battery system). In some embodiments, the joint may need to be tolerant of cyanoacrylate adhesive or a UV curing schedule, if used. In a further example, interfaces requiring uniform thermal management may require a thermal filler, and the fast-cure adhesive may be selected based on this criterion. In a further example, processes **100** and/or **200** may be applied to joints providing structural support between components in a battery module such as shear walls, busbars, current collector assembly, inverter, power electronics, any other suitable components, or any combination thereof.

FIG. 3 shows an exploded perspective view, and an assembled perspective view, of illustrative battery module **300** assembled using adhesives, in accordance with some embodiments of the present disclosure. Battery module **300** includes plurality of battery cells **310**, layer **301**, and side wall sections **303-306**, affixed together using adhesives **353-356**. As used herein, the term “side wall” refers to the collection of lateral surfaces arranged around a plurality of battery cells, and may include a single section or more than one section (e.g., a plurality of sections such as four sections, as illustrated), arranged adjacent to each other or with gaps in between one or more neighboring sections. To illustrate, side wall sections **303-306** may be joined as, or otherwise parts of, a single component (e.g., bent sheet metal), optionally with an open seam to allow ease of installation. As illustrated, adhesive **353** bonds side wall section **303** to a first side of plurality of battery cells **310**; adhesive **354** bonds side wall section **304** to a second side of plurality of battery cells **310**; adhesive **355** bonds side wall section **305** to a third side of plurality of battery cells **310**; and adhesive **356** bonds side wall section **306** to a fourth side of plurality of battery cells **310**. The sides of plurality of battery cells **310** include a collection of cylindrical interfaces to which side wall sections **303-306** may be bonded. For example, each of side wall sections **303-306** may contact only a portion of battery cells arranged on the respective side (e.g., an outermost portion). In a further example, side wall sections **303-306** may be flat, curved, segmented, compound-shaped, scalloped (e.g., to accommodate and more fully follow the curved battery cells), have any other suitable profile or shape, or any combination thereof.

In some embodiments, battery cells of plurality of battery cells **310** may be arranged in a close packing (e.g., hexagonal close packing having any suitable spacing), an array (e.g., a rectangular array), or any other suitable arrangement. In some embodiments, each battery cell of plurality of battery cells **310** may be pressed axially such that ends of the plurality of battery cells distal to layer **301** substantially lie in a plane parallel to layer **301** (e.g., thus laterally and axially aligned). Accordingly, layer **301** may be adhered to plurality of battery cells **310** by any suitable adhesive or combination thereof (e.g., a fast-cure and/or slow-cure adhesive). For example, layer **301** may be adhered by an adhesive applied as

a continuous layer, a layer having holes or openings, an arrangement of suitable drops or dollops that correspond with the arrangement of plurality of battery cells **310**, a path that extends to interface with each battery cell of plurality of battery cells **310** (e.g., in a serpentine path), any other suitable application type, or any combination thereof.

Layer **301** may include one or more current collectors configured to be electrically coupled to plurality of battery cells **310** (or a subset thereof), a carrier configured to maintain a lateral arrangement of plurality of battery cells **310**, or a combination thereof. For example, layer **301** may include a current collector assembly including a plurality of current collectors (e.g., which may include comb-like structures that spread over the battery cells in the plane of layer **301**). Each current collector may be coupled to a subset of plurality of battery cells **310** to form electrical buses. The electrical coupling may be achieved by bonding, welding (e.g., ultrasonic welding, laser welding), pressing or spring force, or a combination thereof (e.g., which may occur during step **208** of process **200** of FIG. **2**). To illustrate, layer **301** may include a carrier that is dielectric or otherwise non-conducting electronically, thus providing insulation between layer **301** and plurality of battery cells **310**. Accordingly, a plurality of leads may be affixed to the current collector(s) of layer **301** and plurality of battery cells **310** to create electrically conductive paths among plurality of battery cells **310**. The current collectors may electrically couple subsets of battery cells in parallel, with the subsets being electrically coupled in series.

In some embodiments, adhesives **353**, **354**, **355**, and **356** include the same type or types of adhesive. In some embodiments, adhesives **353-356** each include the same one or more adhesives. For example, adhesives **353-356** may each include two adhesives to form a pattern (e.g., a fast-cure and a slow-cure adhesive). To illustrate, process **100** of FIG. **1**, or process **200** of FIG. **2**, may be applied to assemble battery module **300**. In some embodiments, each of adhesives **353**, **354**, **355**, and **356** may include a high-strength adhesive and an instant-cure adhesive, which is configured to cure faster than the high-strength adhesive.

In some embodiments, battery module **300** is adhered to a cooling plate, configured to transfer heat from plurality of battery cells **310**. In some embodiments, plurality of battery cells **310** are adhered to side wall sections **303-306** of battery module **300** as well as to a carrier of layer **301** that maintains the positioning of the tops of plurality of battery cells **310**. Battery module **300**, during manufacturing, may undergo various manufacturing steps and may need to be manipulated during the manufacturing process. Accordingly, in order to decrease the amount of time needed before battery module **300** can be manipulated, a fast-cure adhesive (e.g., such as a UV cure adhesive or other suitable adhesive) is used to provide sufficient strength for battery module **300** to be manipulated before the high-strength adhesive sufficiently cures. As illustrated in FIG. **3**, the fast-cure adhesive is applied at a first portion of each interface (e.g., at the corners of the battery module) as well as between layer **301** and plurality of battery cells **310**. For example, the fast-cure portions of adhesives **353-356** may be cured in seconds using a UV light source and may provide sufficient strength for battery module **300** to undergo manipulation. Also as illustrated in FIG. **3**, high-strength adhesive is applied to each of the battery cells interfacing to side wall sections **303-306** (e.g., in a continuous pattern as shown). For example, this ensures that each battery cell interfaces to high-strength adhesive for high strength bonds with side wall sections **303-306**. As illustrated, fast-cure adhesive is

shown by thicker lines or dots, and slow-cure adhesive (e.g., high-strength adhesive) is shown by thinner lines.

FIG. **4** shows an exploded perspective view, and an assembled perspective view (e.g., in panel **499**), of illustrative battery system **400** assembled using adhesives, in accordance with some embodiments of the present disclosure. Battery system **400**, as illustrated, includes battery modules **401** and **402** (e.g., each of which may be similar to battery module **300** of FIG. **3**), cooling plate **403**, and mounting bracket **404**, affixed together using adhesives **451** and **452**. As illustrated, adhesive **451** (shown as lines) is a slow-cure adhesive bonding mounting bracket **404** to a first side of a subassembly including battery modules **401** and **402**. Adhesive **452** (shown as dots) is a fast-cure adhesive bonding mounting bracket **404** to a first side of a subassembly including battery modules **401** and **402**. A battery system such as battery system **400** may include one or more mounting brackets (e.g., mounting bracket **404**) for providing structural support to the system. As illustrated, mounting bracket **404** includes through features **405** (e.g., slots as illustrated, but any suitable through feature(s) may be included), which may provide mechanical interlocking with battery modules **401** and **402**, mechanical interlocking with cooling plate **403**, optical access to fast cure adhesive **452** (e.g., to provide UV irradiation), or a combination thereof. Any suitable combination and pattern of adhesive **451** and adhesive **452** may be applied to the interface between mounting bracket **404** and the subassembly of battery modules **401** and **402**, and cooling plate **403**. As illustrated, dots of adhesive **452** are included to provide adhesion during manufacturing while beads of adhesive **451** cure.

FIG. **5** shows an exploded perspective view, and an assembled perspective view (e.g., in panel **599**), of illustrative battery system **500** having busbars **510** and **511** assembled using adhesives **551** and **552**, in accordance with some embodiments of the present disclosure. Battery system **500**, as illustrated, includes battery modules **501** and **502** (e.g., each of which may be similar to battery module **300** of FIG. **3**), and busbars **510** and **511**, affixed together using adhesives **551** and **552**. As illustrated, adhesive **551** (shown as lines) is a slow-cure adhesive bonding busbars **510** and **511** to respective battery modules **501** and **502**. Adhesive **552** (shown as dots) is a fast-cure adhesive bonding busbars **510** and **511** to respective battery modules **501** and **502**. A battery system such as battery system **500** may include one or more busbars (e.g., busbars **510** and **511**), current collectors, control modules, power electronics, control circuitry, electrical components, or a combination thereof for managing operation of the system. Any suitable combination and pattern of adhesive **551** and adhesive **552** may be applied to the interface between electrical components (e.g., busbars **510** and **511**) and the subassembly of battery modules **501** and **502**. As illustrated, dots of adhesive **552** are included to provide adhesion during manufacturing while beads of adhesive **551** cure.

In an illustrative example, any of the assemblies of FIGS. **3-5** may be combined to form a battery system. For example, a battery system may include a plurality of battery cells, a carrier, current collectors, busbars, a cooling plate, one or more side wall sections, a mounting bracket, any other suitable components, or any combination thereof, assembled using a fast-cure adhesive and a slow-cure adhesive.

The foregoing is merely illustrative of the principles of this disclosure, and various modifications may be made by those skilled in the art without departing from the scope of this disclosure. The above-described embodiments are presented for purposes of illustration and not of limitation. The

11

present disclosure also can take many forms other than those explicitly described herein. Accordingly, it is emphasized that this disclosure is not limited to the explicitly disclosed methods, systems, and apparatuses, but is intended to include variations to and modifications thereof, which are within the spirit of the following claims. 5

What is claimed is:

1. A method for making a battery system comprising:
applying a first adhesive to a first surface, wherein the first adhesive comprises a first curing time; 10
applying a second adhesive to a second surface, wherein the second adhesive comprises a second curing time less than the first curing time;
positioning the first and the second surfaces to form an interface without the second adhesive overlapping the first adhesive at the interface; and 15
curing the second adhesive based on the second curing time to allow a manufacturing process while the first adhesive cures.
2. The method of claim 1, wherein:
the interface is between a plurality of battery cells and a sidewall;
the first surface is at least one of a side of the plurality of battery cells or a side of the sidewall; and
the second surface is at least one of a side of the plurality of battery cells or a side of the sidewall. 25
3. The method of claim 2, wherein the second adhesive is a UV-cure adhesive, wherein the sidewall comprises a transmittance sufficient to allow UV light to pass through to UV-cure the second adhesive during the curing. 30
4. The method of claim 1, wherein:
the interface is between a plurality of battery cells and a carrier;
the first surface is at least one of an end of the plurality of battery cells or a side of the carrier; and 35
the second surface is at least one of an end of the plurality of battery cells or a side of the carrier.
5. The method of claim 1, wherein:
the interface is between a busbar and a sidewall, wherein the busbar is configured to be electrically coupled to a plurality of battery cells, and wherein the sidewall is configured to provide structural support to the plurality of battery cells; 40
the first surface is at least one of a surface of the busbar or a surface of the sidewall; and

12

the second surface is at least one of a surface of the busbar or a surface of the sidewall.

6. The method of claim 1, wherein
the interface is between a sidewall and a mounting bracket, wherein the sidewall is configured to provide structural support to a plurality of battery cells, and wherein the mounting bracket is configured to provide structural support to the plurality of battery cells and the sidewall;
the first surface is at least one of a surface of the sidewall or a surface of the mounting bracket; and
the second surface is at least one of a surface of the sidewall or a surface of the mounting bracket.
7. The method of claim 6, wherein the mounting bracket comprises one or more through features to allow the curing of the second adhesive.
8. The method of claim 1, wherein the manufacturing process comprises electrically coupling a plurality of battery cells to one or more busbars. 20
9. The method of claim 1, wherein the manufacturing process comprises mechanically coupling a plurality of battery cells to a cooling plate.
10. A method for making a battery system comprising:
applying a first adhesive to a first portion of an interface between a plurality of battery cells and a sidewall, wherein the first adhesive comprises a first curing time;
applying a second adhesive to a second portion of the interface between the plurality of battery cells and the sidewall, wherein the second adhesive comprises a second curing time less than the first curing time;
positioning the sidewall adjacent to the plurality of battery cells without the second portion overlapping the first portion at the interface; and
curing the second adhesive based on the second curing time to allow a manufacturing process while the first adhesive cures.
11. The method of claim 10, wherein the second adhesive comprises a UV-cure adhesive.
12. The method of claim 10, wherein the second adhesive comprises a moisture-cure adhesive.
13. The method of claim 10, wherein the first adhesive comprises an epoxy adhesive.

* * * * *